


Hot Air Heater SAHD-8 Series

SAHD □v-□w/8PH/+ Option

A φ 3-φ 0.8× 4P× 80mm  
Coil-Ring MD φ 0.65 d φ 0.35

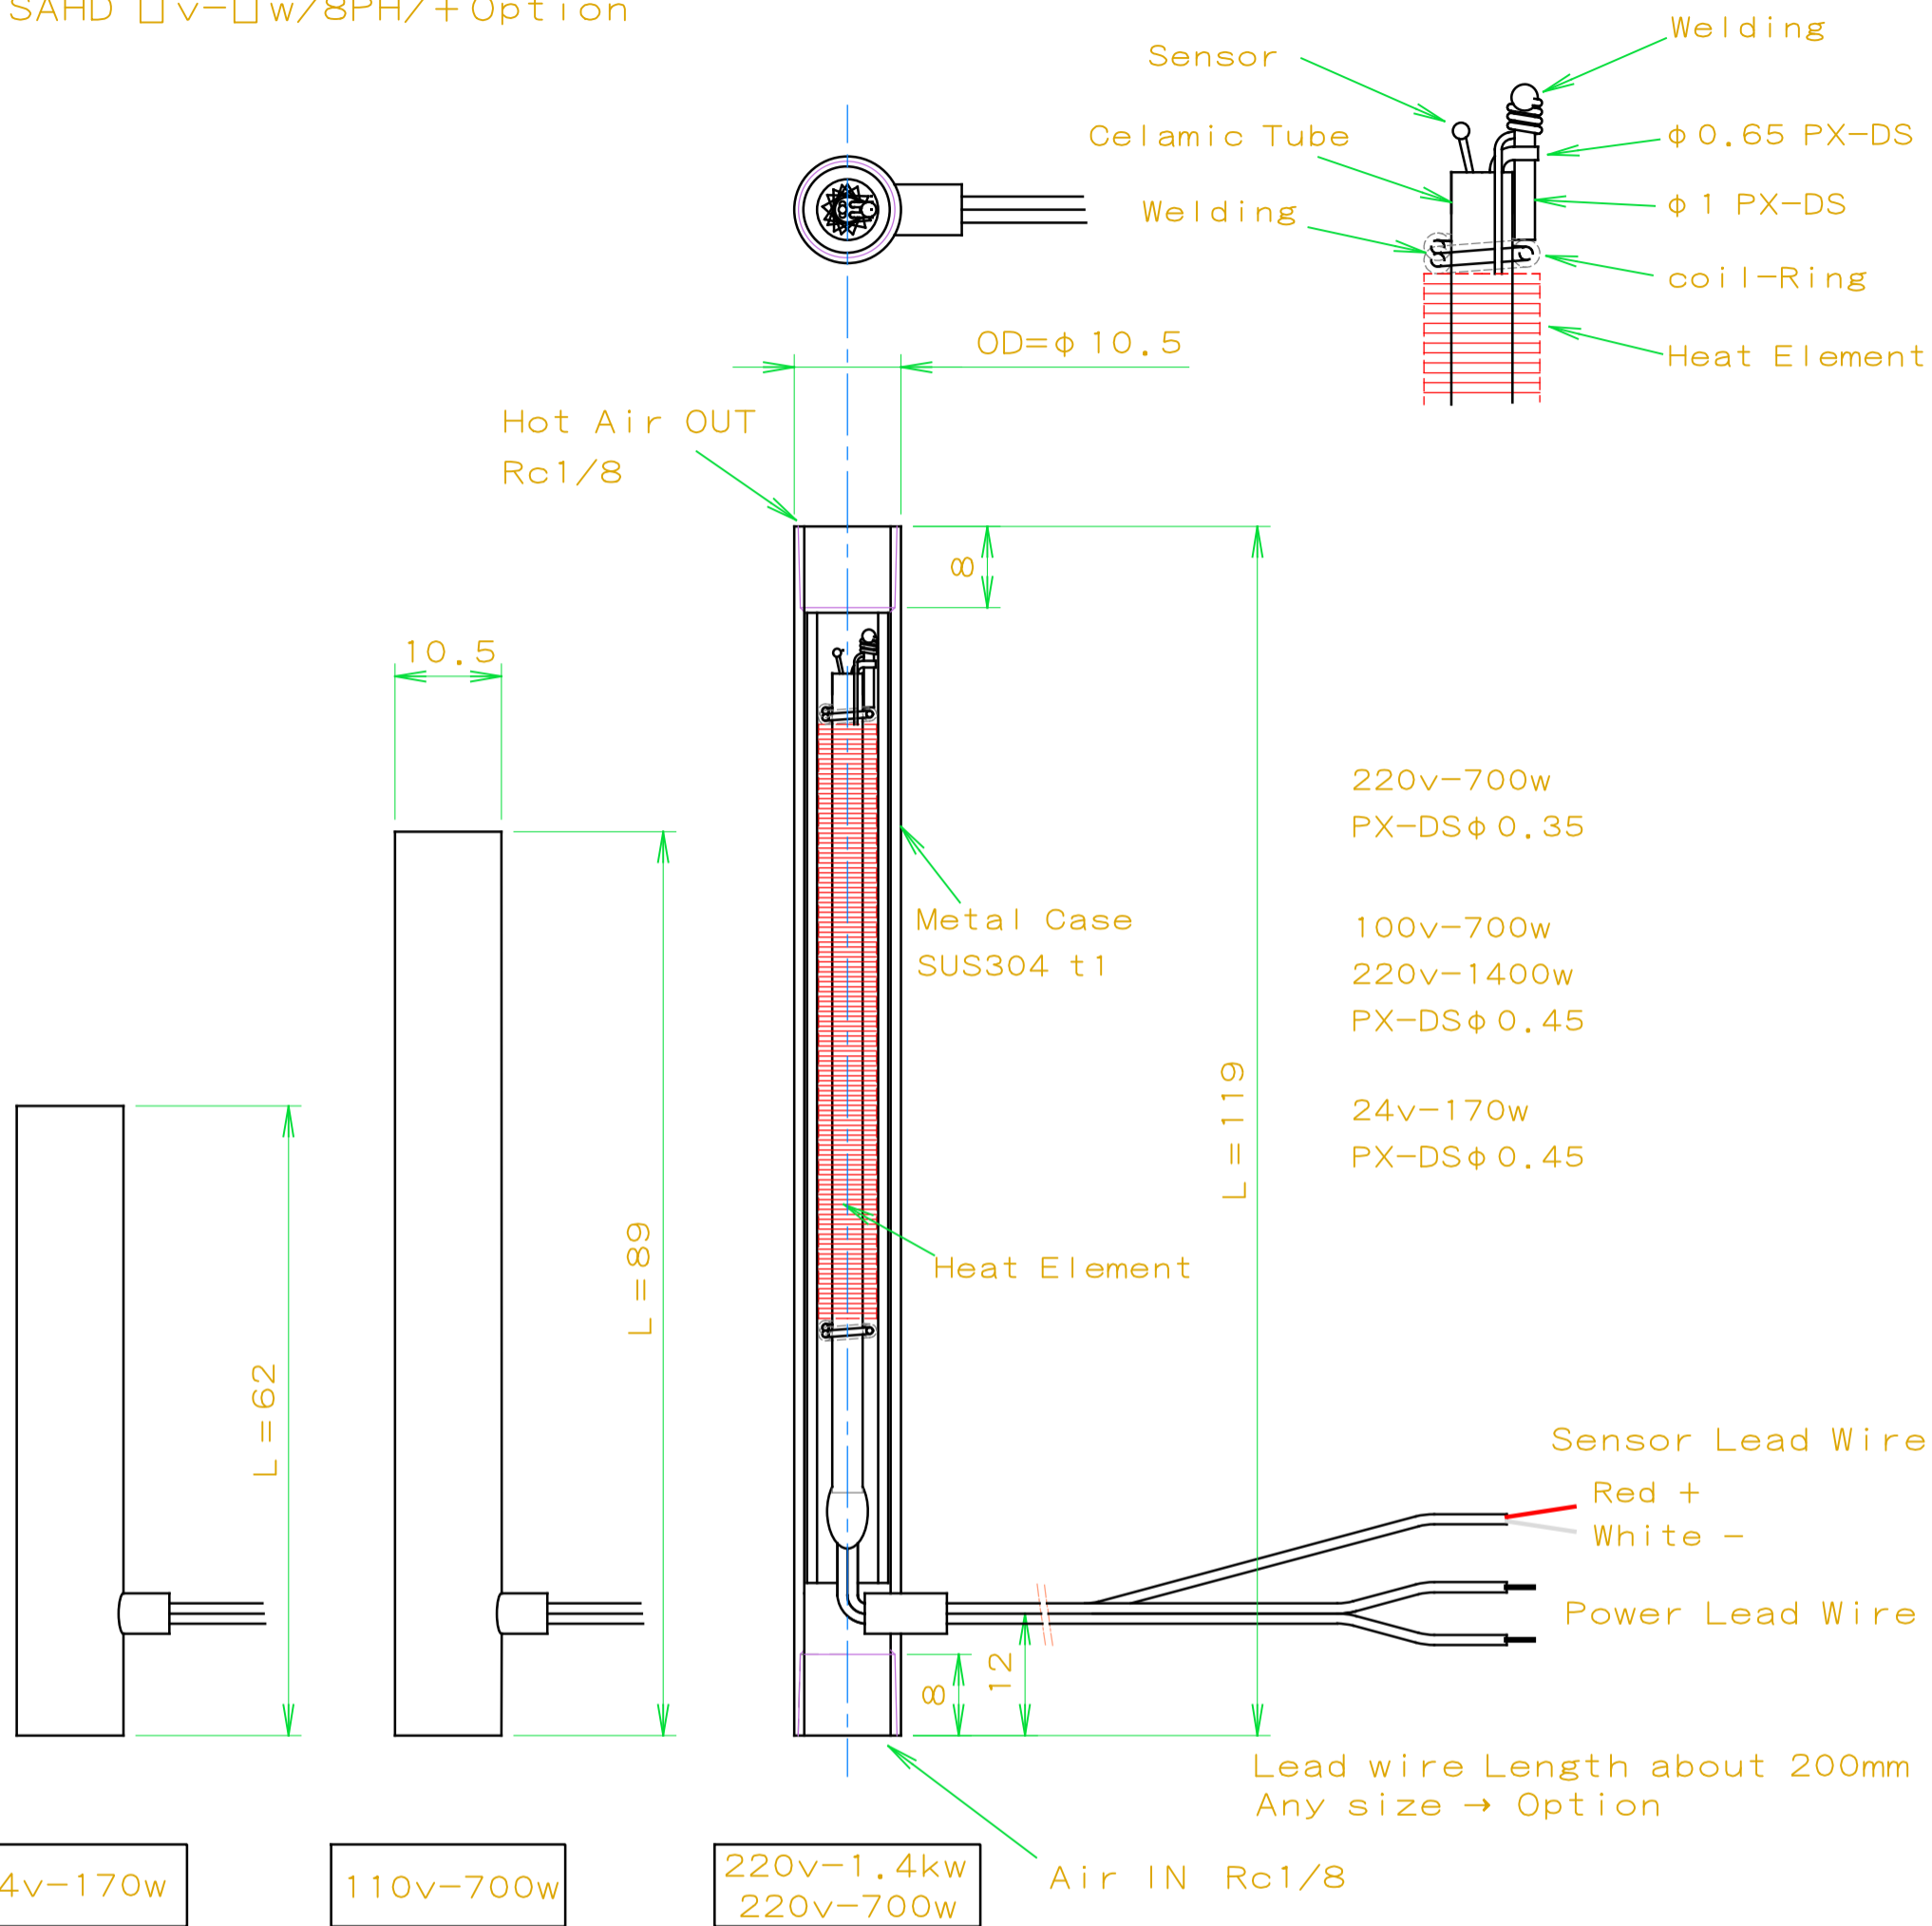

220v-1.4kw-Type needs note because it is high pressure-loss.  
220v type:The maximum common use temperature≠1000℃

- ※Temp.Sensor is option: Symbol→/+S
- Non overHeat Sensor: Symbol→/+SC
- K-Type Sensor 650℃: Symbol→/+S,/+SC
- N-Type Sensor 850℃: /+S(N),/+SC(N)
- R-Type Sensor 1100℃: /+S(R),/+SC(R)
- Don't support two Sensor.

L	62mm	89mm	119mm	
Relation Volts-Watts	19v-107w 15v-66w	100v-579w 90v-469w	200v-579w 180v-469w	200v-1.16kw 180v-0.94kw
Rate	24v-170w	110v-700w	220v-700w	220v-1.4kw
Type	SAHD □v-□w/8PH/+ Option			
Name	Hot Air Heater SAHD-8 Series			

DATE 2019/07/06 Design S.A

F i n t e c h . c o . j p